


## 02

## EXOSET® SAFETY LIFTING CLAMPS

Height Safety  
Lifting  
Load Control  
Safety Management

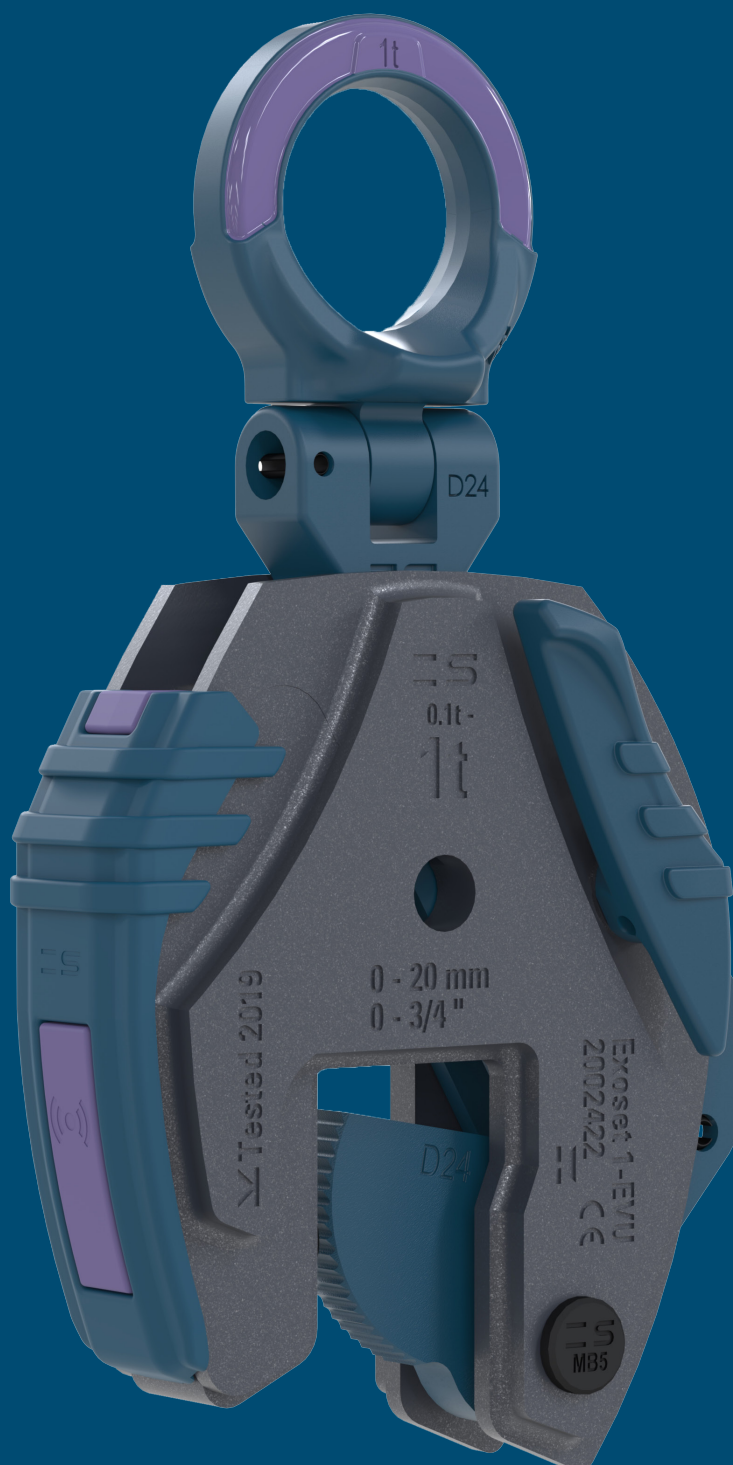

## SpanSet worldwide - Reliability since 1966

You can always rely on SpanSet. Our practical solutions for height safety, lifting technology and load control are individually manufactured for you according to ISO-certified procedures. They stand for the highest quality and working efficiency.

SpanSet also supports you before and after purchase: with services, inspections, and a comprehensive training programme as well as personal advice for your practical requirements. And, you can rely on that.


### We are Accountable

Safety is our top priority when it comes to protecting human lives, lifting heavy loads, or transporting goods. We offer well-known, quality products and innovations in the fields of height safety, lifting technology and load control.

### Please visit us on our homepage

At [www.spanset.com](http://www.spanset.com) you will discover interesting information about our company, new products, trade fair dates, services and our distribution network of specialist dealers throughout Switzerland. Simply photograph the QR code with your mobile phone's QR reader.

SpanSet  
Certified  
Safety

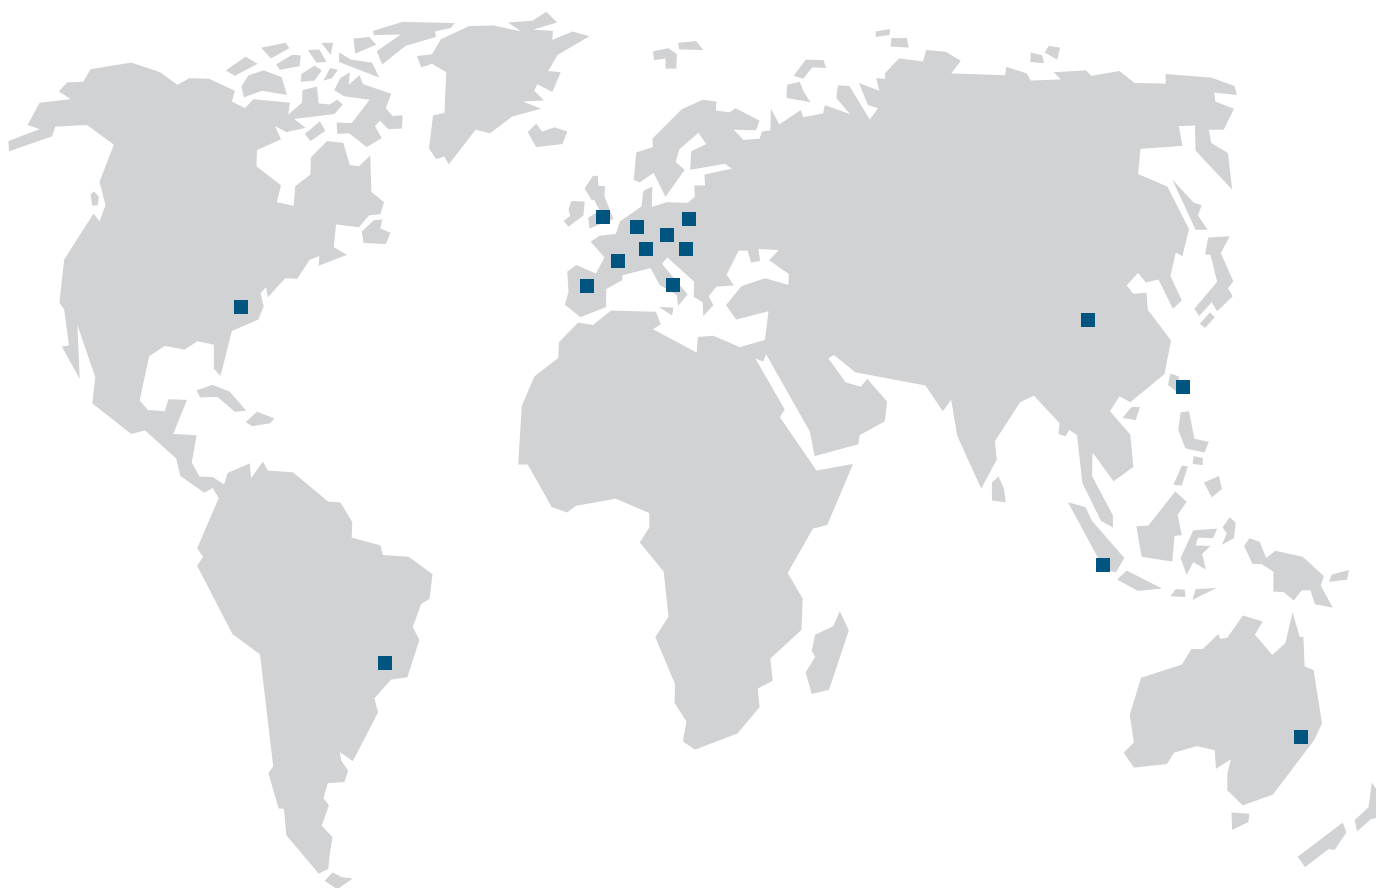

### SpanSet worldwide:

Switzerland, Germany, England, Spain, France, Italy,  
Austria, Hungary, Netherlands, Poland, Australia,  
Brazil, USA, Indonesia, Taiwan, China





**APPROVED**

**DNV Type Approval:**

Exoset safety lifting clamps are the only lifting clamps in the world with a type approval by DNV.

# EXOSET UNIVERSAL VERTICAL SAFETY LIFTING CLAMPS

SpanSet, the market leader in webbing based products, once again confirms its innovative power with the introduction of a series of universal vertical safety lifting clamps.

In many ways, Exoset safety lifting clamps offer improvements when compared to the lifting clamps currently available. When we started developing Exoset safety lifting clamps, our main tasks were to improve safety on the shop floor and the clamp's ergonomics. We have achieved both goals in designing the Exoset clamps; an effort that has been recognised in the award of a DNV certificate. Exoset safety lifting clamps are the only lifting clamps in the world certified by DNV.

## Improved safety

We added a maximum WLL indicator, located where it is clearly visible on the hoisting eye and the grip. This Indicator makes it easy for the user to recognize the maximum load for which the lifting clamp can be used. Additionally we improved safety by adding an overload indicator as well as a corrosion resistant layer. There is also an option for a wear indicator. These innovations improve safety on the shop floor!

## Easier handling

We have constructed a series of very robust, lightweight clamps. This is possible using welded bodies and the highest quality Naxtra steel. The grip has been specially designed to give the user a better hold on the clamp while attaching it to the plate. We improved and enlarged the latch design for easier opening and closing. These innovations improve the ergonomics of our Exoset safety lifting clamps.

## Vertical transport of plates - universal

Exoset universal vertical safety lifting clamps are suitable for the lifting, turning (180°), moving and vertical transfer of sheet materials, plates and fabrications. Plates can also be turned from horizontal to vertical and back down to horizontal (180°).

All Exoset universal vertical safety lifting clamps are fitted with a locking device for both open- and closed positions, which ensures complete safety. The universal hoisting eye allows the clamp to place and lift the load from any direction, or with a multiple leg sling without side-loading the clamp.

## Exoset hoisting eye shaft


The Exoset hoisting eye shaft has two flat sides, due to this construction the friction is better distributed and indents in the body can be avoided. This construction distributes the force more evenly, reduces wear and extends the service life of the Exoset safety lifting clamp.

## Nominal carrying capacity WLL [kg]

|                                                                                   |          |                                                                                     |            |
|-----------------------------------------------------------------------------------|----------|-------------------------------------------------------------------------------------|------------|
|  | 500 kg   |  | 5.000 kg   |
|  | 1.000 kg |  | 6.000 kg   |
|  | 2.000 kg |  | 8.000 kg   |
|  | 3.000 kg |  | 10.000 kg  |
|  | 4.000 kg |  | >10.000 kg |

## Exoset safety lifting clamps are the only lifting clamps in the world certified by DNV.

- DNV Type Approval – ST – 0378
- European Norm EN 13155
- USA Norm ASME B30.20, Design category C, Service class 4
- USA Norm ASME BTH – 1
- Australian Norm 4991
-  European Machine Directive 2006/42/EC.

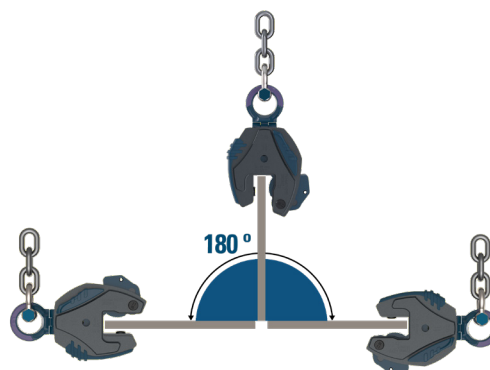

0.5t



1t



2t

# USP

MADE IN  
EUROPE



**Maximum WLL indicator**

**Optimised hoisting eye shape**

**Improved, larger latch design**

For easier opening and closing

**Grip for easier handling**

**Improved corrosion resistance**

Parts are powder coated

**Maximum WLL indicator**

**Welded alloy body**

Very robust,  
lightweight body

**Equipped with RFID chip**

**Overload indicator  
for body**

Improved safety

**Optional:  
Wear indicator on camsegment  
and pivot**

Special coloured hardening on  
camsegment and pivot

**Alloy steel shafts with  
anti-corrosion coating  
and traceability code**

All load-bearing parts are  
marked with a batch code



3t



5t



6t

# UNIVERSAL VERTICAL LIFTING CLAMPS – FOR LIFTING IN ANY DIRECTION

- Available in capacities 0.5t-6t. Higher WLL and different jaw apertures are available upon request.
- Lock open, lock closed ability with latch for pre-tension on load and then release of load.
- Breaking Load Limit of 6x WLL
- Load cycles until Exoset universal vertical safety lifting clamps are unusable (tested in vertical position); 2.000.000 load cycles.
- For use with materials with a surface hardness up to 364 HV, tensile strength 1200 N/mm<sup>2</sup>.
- Minimum WLL needed is 10% of maximum WLL
- Temperature range -40°C/104°F - +100°C/212°F.
- Each clamp is individually serialized. Serial number and date of Proof Load test are permanently marked on the body.
- All load-bearing parts are marked with a traceability code and the SpanSet logo to guarantee the original, highest-quality SpanSet parts.
- Individually Proof Tested to 2x the Working Load Limit with certification.
- Instruction manual and test certificate included with each clamp.
- Service and repair manual available through SpanSet website.
- Maintenance and overhaul kits for all clamps are available. All Exoset safety lifting clamps are RFID equipped.
- Exoset safety lifting clamps are the only safety lifting clamps in the world certified by DNV.
- EVU H for vertical lifting, transporting and turning of all steel plates with a maximum hardness of 473 HV, tensile strength 1550 N/mm<sup>2</sup> (for example Hardox 400 and 500).
- EVU S for vertical lifting, transporting and turning for stainless steel plates. With a maximum hardness of 364 HV, tensile strength 1200 N/mm<sup>2</sup>.
- 5 Year Warranty (see conditions on [www.Spanset.com](http://www.Spanset.com))
- See other Exoset products for connection between clamp and the hoist hook.

## Specification table (Metric)

|                                                                                     | Model     | WLL (t) | Order number | Jaw aperture (mm) | A  | B   | C   | D   | Dimensions (mm) |    |     |    |    |    | E    | F | G | H | I | J | Product weight (kg) |
|-------------------------------------------------------------------------------------|-----------|---------|--------------|-------------------|----|-----|-----|-----|-----------------|----|-----|----|----|----|------|---|---|---|---|---|---------------------|
|    | 0,5-EVU   | 0,5     | 2002421      | 0-16              | 39 | 226 | 134 | 40  | 41              | 22 | 114 | 13 | 20 | 28 | 1.9  |   |   |   |   |   |                     |
|   | 1-EVU     | 1       | 2002422      | 0-20              | 39 | 237 | 145 | 52  | 44              | 28 | 127 | 13 | 20 | 28 | 2.1  |   |   |   |   |   |                     |
|  | 2-EVU     | 2       | 2002423      | 0-35              | 68 | 375 | 209 | 76  | 61              | 48 | 192 | 18 | 32 | 44 | 7.6  |   |   |   |   |   |                     |
|  | 3-EVU     | 3       | 2002424      | 0-40              | 73 | 446 | 262 | 101 | 71              | 55 | 230 | 22 | 42 | 58 | 14.8 |   |   |   |   |   |                     |
|  | 5-EVU     | 5       | 2002425      | 0-40              | 73 | 446 | 262 | 101 | 71              | 55 | 230 | 22 | 42 | 62 | 16.0 |   |   |   |   |   |                     |
|  | 6-EVU     | 6       | 2002426      | 0-50              | 80 | 549 | 327 | 131 | 97              | 59 | 284 | 37 | 42 | 62 | 24.0 |   |   |   |   |   |                     |
| For very hard materials - with universal hoisting eye                               |           |         |              |                   |    |     |     |     |                 |    |     |    |    |    |      |   |   |   |   |   |                     |
|  | 0,5-EVU H | 0,5     | 2012561      | 0-16              | 39 | 226 | 134 | 40  | 41              | 22 | 114 | 13 | 20 | 28 | 1.9  |   |   |   |   |   |                     |
|  | 1-EVU H   | 1       | 2012562      | 0-20              | 39 | 237 | 145 | 52  | 44              | 28 | 127 | 13 | 20 | 28 | 2.1  |   |   |   |   |   |                     |
|  | 2-EVU H   | 2       | 2012563      | 0-35              | 68 | 375 | 209 | 76  | 61              | 48 | 192 | 18 | 32 | 44 | 7.6  |   |   |   |   |   |                     |
|  | 3-EVU H   | 3       | 2012564      | 0-40              | 73 | 446 | 262 | 101 | 71              | 52 | 230 | 22 | 42 | 58 | 14.8 |   |   |   |   |   |                     |
|  | 5-EVU H   | 5       | 2012565      | 0-40              | 73 | 446 | 262 | 101 | 71              | 52 | 230 | 22 | 42 | 62 | 16.0 |   |   |   |   |   |                     |
|  | 6-EVU H   | 6       | 2012566      | 0-50              | 80 | 549 | 327 | 131 | 97              | 59 | 284 | 37 | 42 | 62 | 24.0 |   |   |   |   |   |                     |
| For stainless steel - with universal hoisting eye                                   |           |         |              |                   |    |     |     |     |                 |    |     |    |    |    |      |   |   |   |   |   |                     |
|  | 0,5-EVU S | 0,5     | 2012567      | 0-16              | 39 | 226 | 134 | 40  | 41              | 22 | 114 | 13 | 20 | 28 | 1.9  |   |   |   |   |   |                     |
|  | 1-EVU S   | 1       | 2012568      | 0-20              | 39 | 237 | 145 | 52  | 44              | 28 | 127 | 13 | 20 | 28 | 2.1  |   |   |   |   |   |                     |
|  | 2-EVU S   | 2       | 2012569      | 0-35              | 68 | 375 | 209 | 76  | 61              | 48 | 192 | 18 | 32 | 44 | 7.6  |   |   |   |   |   |                     |
|  | 3-EVU S   | 3       | 2012570      | 0-40              | 73 | 446 | 262 | 101 | 71              | 52 | 230 | 22 | 42 | 58 | 14.8 |   |   |   |   |   |                     |
|  | 5-EVU S   | 5       | 2012571      | 0-40              | 73 | 446 | 262 | 101 | 71              | 52 | 230 | 22 | 42 | 62 | 16.0 |   |   |   |   |   |                     |
|  | 6-EVU S   | 6       | 2012572      | 0-50              | 80 | 549 | 327 | 131 | 97              | 59 | 284 | 37 | 42 | 62 | 24.0 |   |   |   |   |   |                     |



Hard materials



Stainless steel





Long life and wear indicator

# TECHNICAL SPECIFICATIONS

## Dimensions

## Load angles diagram

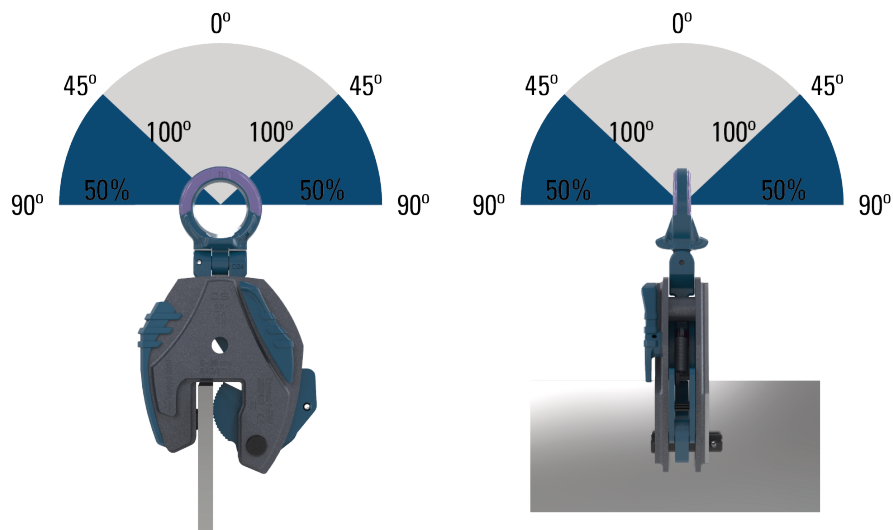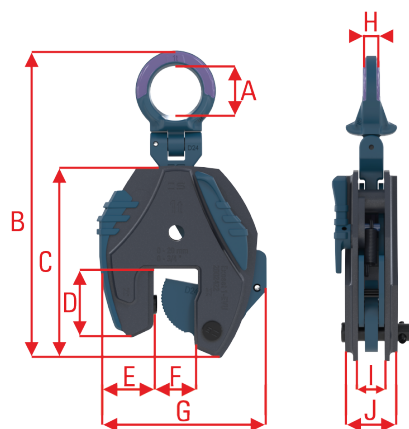

## Specification table (Metric)

| Model     | WLL (t) | Order number | Jaw aperture (mm) | Dimensions (mm) - large jaw aperture |     |     |     |    |     |     |    |    |    | Product weight (kg) |
|-----------|---------|--------------|-------------------|--------------------------------------|-----|-----|-----|----|-----|-----|----|----|----|---------------------|
| A         | B       | C            | D                 | E                                    | F   | G   | H   | I  | J   |     |    |    |    |                     |
| 0,5-EVU J | 0,5     | 2030330      | 15-30             | 39                                   | 226 | 134 | 40  | 41 | 41  | 125 | 13 | 20 | 28 | 2.0                 |
| 1-EVU J   | 1       | 2030331      | 20-40             | 39                                   | 237 | 145 | 52  | 44 | 51  | 145 | 13 | 20 | 28 | 2.6                 |
| 2-EVU J   | 2       | 2030332      | 35-70             | 68                                   | 375 | 209 | 76  | 61 | 87  | 225 | 18 | 32 | 44 | 8.9                 |
| 3-EVU J   | 3       | 2030333      | 40-80             | 73                                   | 446 | 262 | 101 | 71 | 100 | 265 | 22 | 42 | 58 | 13.7                |
| 5-EVU J   | 5       | 2030334      | 40-80             | 73                                   | 446 | 262 | 101 | 71 | 100 | 265 | 22 | 42 | 62 | 16.4                |
| 6-EVU J   | 6       | 2030335      | 50-100            | 80                                   | 549 | 327 | 131 | 97 | 114 | 330 | 37 | 42 | 62 | 24.9                |

### For very hard materials - with universal hoisting eye - large jaw aperture

| Model      | WLL (t) | Order number | Jaw aperture (mm) | A  | B   | C   | D   | E  | F   | G   | H  | I  | J  | Product weight (kg) |
|------------|---------|--------------|-------------------|----|-----|-----|-----|----|-----|-----|----|----|----|---------------------|
| 0,5-EVU HJ | 0,5     | 2030336      | 15-30             | 39 | 226 | 134 | 40  | 41 | 41  | 125 | 13 | 20 | 28 | 2.0                 |
| 1-EVU HJ   | 1       | 2030337      | 20-40             | 39 | 237 | 145 | 52  | 44 | 51  | 145 | 13 | 20 | 28 | 2.6                 |
| 2-EVU HJ   | 2       | 2030338      | 35-70             | 68 | 375 | 209 | 76  | 61 | 87  | 225 | 18 | 32 | 44 | 8.9                 |
| 3-EVU HJ   | 3       | 2030339      | 40-80             | 73 | 446 | 262 | 101 | 71 | 100 | 265 | 22 | 42 | 58 | 13.7                |
| 5-EVU HJ   | 5       | 2030340      | 40-80             | 73 | 446 | 262 | 101 | 71 | 100 | 265 | 22 | 42 | 62 | 16.4                |
| 6-EVU HJ   | 6       | 2030341      | 50-100            | 80 | 549 | 327 | 131 | 97 | 114 | 330 | 37 | 42 | 62 | 24.9                |

### For stainless steel - with universal hoisting eye - large jaw aperture

| Model      | WLL (t) | Order number | Jaw aperture (mm) | A  | B   | C   | D   | E  | F   | G   | H  | I  | J  | Product weight (kg) |
|------------|---------|--------------|-------------------|----|-----|-----|-----|----|-----|-----|----|----|----|---------------------|
| 0,5-EVU SJ | 0,5     | 2030342      | 15-30             | 39 | 226 | 134 | 40  | 41 | 41  | 125 | 13 | 20 | 28 | 2.0                 |
| 1-EVU SJ   | 1       | 2030343      | 20-40             | 39 | 237 | 145 | 52  | 44 | 51  | 145 | 13 | 20 | 28 | 2.6                 |
| 2-EVU SJ   | 2       | 2030344      | 35-70             | 68 | 375 | 209 | 76  | 61 | 87  | 225 | 18 | 32 | 44 | 8.9                 |
| 3-EVU SJ   | 3       | 2030345      | 40-80             | 73 | 446 | 262 | 101 | 71 | 100 | 265 | 22 | 42 | 58 | 13.7                |
| 5-EVU SJ   | 5       | 2030346      | 40-80             | 73 | 446 | 262 | 101 | 71 | 100 | 265 | 22 | 42 | 62 | 16.4                |
| 6-EVU SJ   | 6       | 2030347      | 50-100            | 80 | 549 | 327 | 131 | 97 | 114 | 330 | 37 | 42 | 62 | 24.9                |




0.5t



1t



2t



3t



5t



6t



### IDXpert Net provides you with a robust asset management and tracking system

- Utilises the latest RFID technology to automate the routine inspection process for your equipment.
- Allows online access to your certificates and inspection records wherever you are connected to a secure web portal.
- Uniquely identifies all items of equipment with RFID tags to reduce inspection times.
- Provides a facility audit via a hand held device to check the inspection status of equipment.

### Examples of Equipment that can benefit from IDXPert Net management

- Exoset safety lifting clamps
- Working at height personal protective equipment
- Fall arrest blocks
- Working at height hardware and connectors
- Synthetic lifting slings
- Chain slings and wire ropes
- Hoists, shackles and lifting accessories
- Cranes
- Fork lift trucks



Most SpanSet products are equipped with IDXPert transponders, for example Exoset safety clamps and lifting slings. Other products can also be retrofitted with an IDXPert transponder. There are different tag options for different applications. For more information, see [www.spanset.com](http://www.spanset.com).

### Traceability


The body and all load-bearing parts of an Exoset safety lifting clamp are permanently marked with SpanSet short logo, serial number, batch code, test date and/or year of manufacture. Identification points such as clamp type, load capacity, jaw width (in mm and inches) are firmly stamped on the body of an Exoset safety lifting clamp.



Camsegment shaft



Hoisting eye shaft




Pivot

# EXOSET VERTICAL SAFETY LIFTING CLAMPS - FOR LIFTING IN ANY DIRECTION

## Ordering numbers

|                                                                                     | Model            | WLL (t) | Order number clamp | Order number Maintenance kit | Order number Overhaul kit | Order number grip | Order number hoisting eye |
|-------------------------------------------------------------------------------------|------------------|---------|--------------------|------------------------------|---------------------------|-------------------|---------------------------|
|    | <b>0,5-EVU</b>   | 0,5     | 2002421            | 2011063                      | 2011069                   | 2011075           | 2012526                   |
|    | <b>1-EVU</b>     | 1       | 2002422            | 2011064                      | 2011070                   | 2011076           | 2012525                   |
|    | <b>2-EVU</b>     | 2       | 2002423            | 2011065                      | 2011071                   | 2011077           | 2012527                   |
|    | <b>3-EVU</b>     | 3       | 2002424            | 2011066                      | 2011072                   | 2011078           | 2012528                   |
|    | <b>5-EVU</b>     | 5       | 2002425            | 2011067                      | 2011073                   | 2011079           | 2012529                   |
|    | <b>6-EVU</b>     | 6       | 2002426            | 2011068                      | 2011074                   | 2011080           | 2012530                   |
| <b>For very hard materials - with universal hoisting eye</b>                        |                  |         |                    |                              |                           |                   |                           |
|    | <b>0,5-EVU H</b> | 0,5     | 2012561            | 2016902                      | 2016915                   | 2011075           | 2012526                   |
|    | <b>1-EVU H</b>   | 1       | 2012562            | 2016903                      | 2016916                   | 2011076           | 2012525                   |
|    | <b>2-EVU H</b>   | 2       | 2012563            | 2016904                      | 2016917                   | 2011077           | 2012527                   |
|    | <b>3-EVU H</b>   | 3       | 2012564            | 2016905                      | 2016918                   | 2011078           | 2012528                   |
|    | <b>5-EVU H</b>   | 5       | 2012565            | 2016906                      | 2016919                   | 2011079           | 2012529                   |
|    | <b>6-EVU H</b>   | 6       | 2012566            | 2016907                      | 2016920                   | 2011080           | 2012530                   |
| <b>For stainless steel - with universal hoisting eye</b>                            |                  |         |                    |                              |                           |                   |                           |
|    | <b>0,5-EVU S</b> | 0,5     | 2012567            | 2016908                      | 2016921                   | 2011075           | 2012526                   |
|    | <b>1-EVU S</b>   | 1       | 2012568            | 2016909                      | 2016922                   | 2011076           | 2012525                   |
|    | <b>2-EVU S</b>   | 2       | 2012569            | 2016910                      | 2016923                   | 2011077           | 2012527                   |
|    | <b>3-EVU S</b>   | 3       | 2012570            | 2016911                      | 2016924                   | 2011078           | 2012528                   |
|  | <b>5-EVU S</b>   | 5       | 2012571            | 2016912                      | 2016925                   | 2011079           | 2012529                   |
|  | <b>6-EVU S</b>   | 6       | 2012572            | 2016913                      | 2016926                   | 2011080           | 2012530                   |

### Maintenance kit

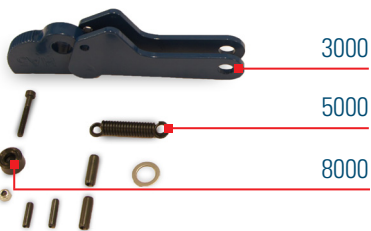

### Overhaul kit



### Optimum availability of spare parts and kits

The modular design of an Exoset Safety Lifting Clamp allows a quick and accurate inspection of the Exoset clamp as well as cost-effective parts replacement. Maintenance- and overhaul kits are available for all Exoset clamps.



Exoset shackle



Sling Joker hook



SpanSet Sling

# EXOSET VERTICAL SAFETY LIFTING CLAMPS - FOR LIFTING IN ANY DIRECTION



| Descr.   | Body complete | Hoisting eye complete | Camsegment complete | Latch complete | Spring for latch complete | Camsegment shaft complete | Hoisting eye shaft | Pivot complete | Grip complete |
|----------|---------------|-----------------------|---------------------|----------------|---------------------------|---------------------------|--------------------|----------------|---------------|
| Part no. | 1000          | 2000                  | 3000                | 4000           | 5000                      | 6000                      | 7000               | 8000           | 9000          |

## Service and repair

There is a Service and Repair manual available for every Exoset Safety Lifting clamp. The manual provides clear instructions about how to inspect, maintain and test Exoset clamps. With the use of illustrations we explain how to assemble and disassemble Exoset clamps. We provide a table with the allowed tolerances for all parts and instructions regarding when to replace a part.



Instruction Manual







Service and Repair manual



IDX4U

DO'S  
AND  
DON'TS!

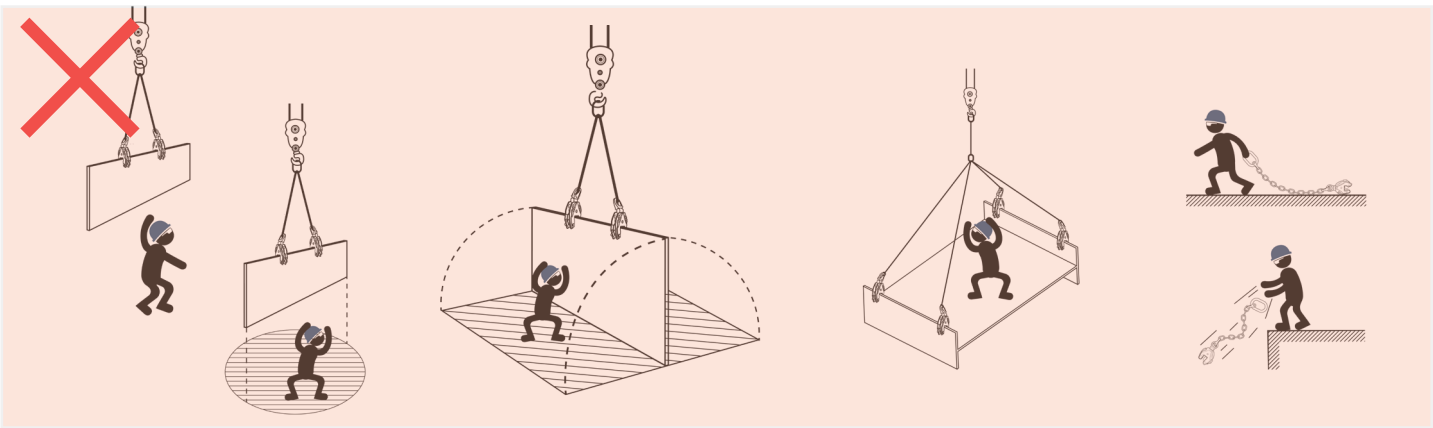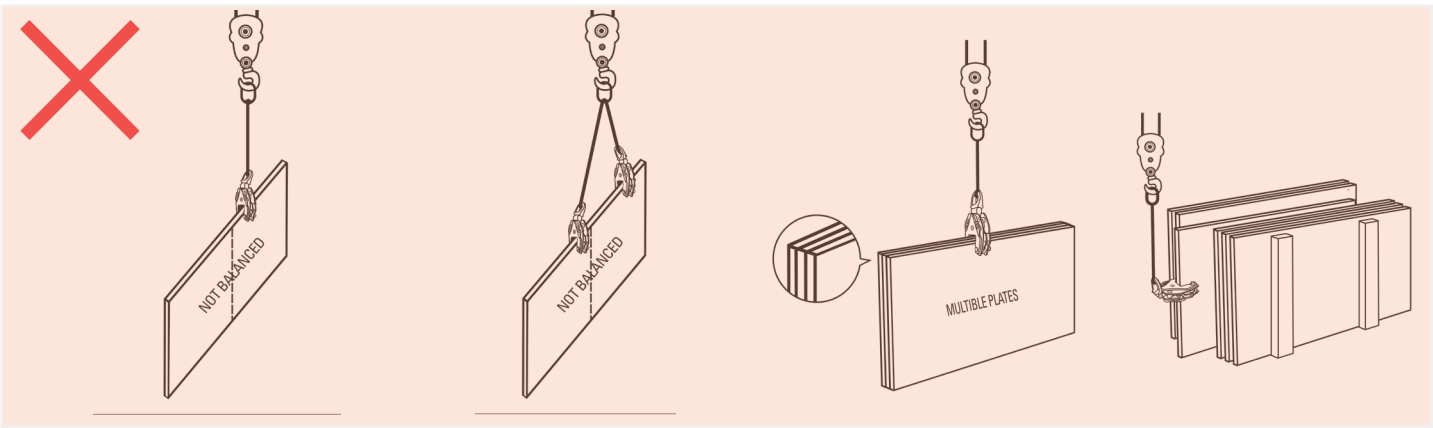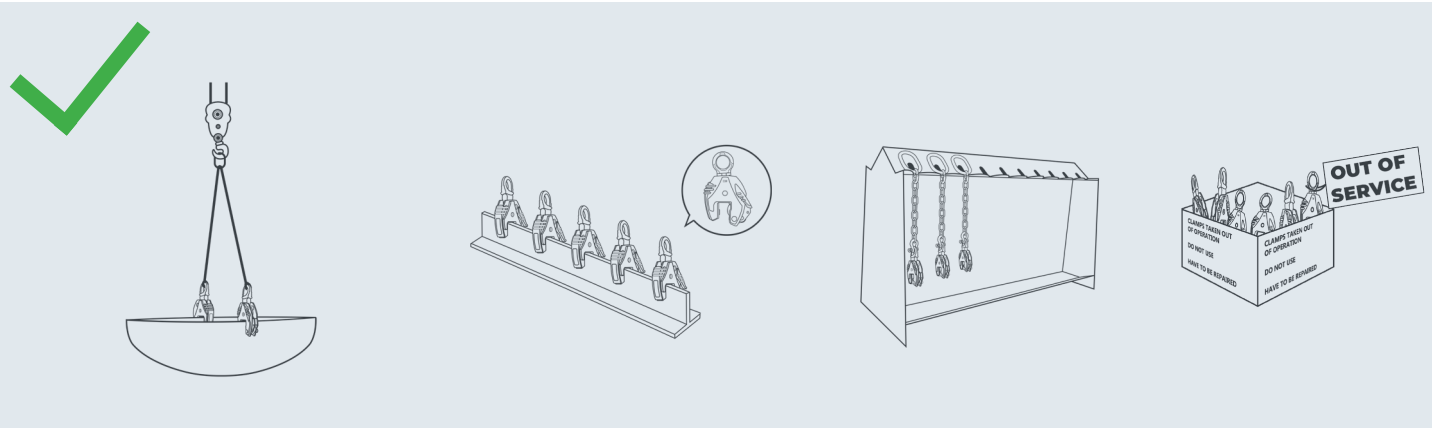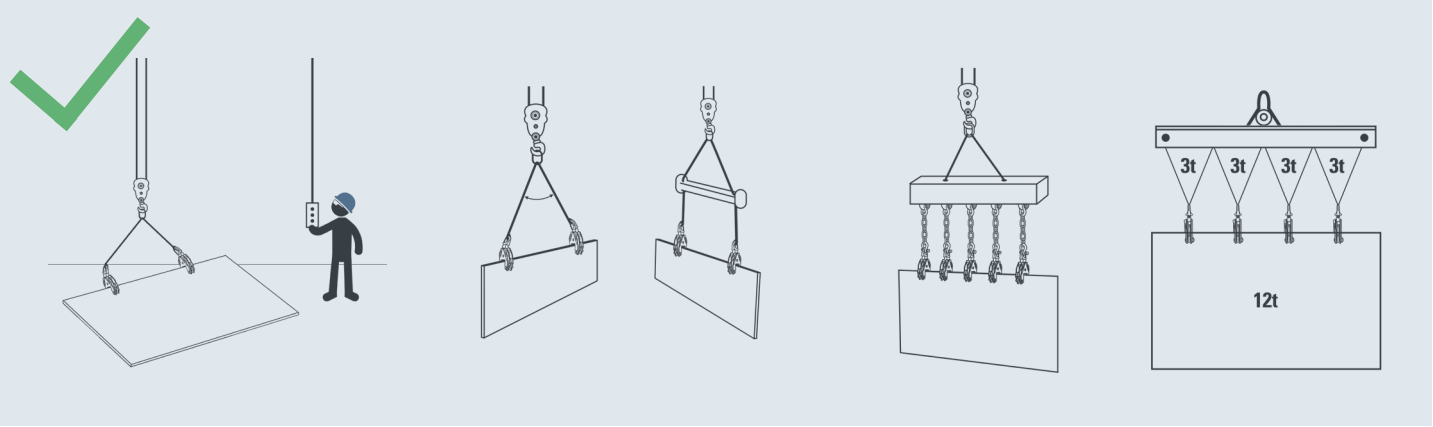

## TRAINING PROGRAMS

### Sales Training:

|               |                                                                                                                             |
|---------------|-----------------------------------------------------------------------------------------------------------------------------|
| Target group: | Sales & Service engineers, Distributors                                                                                     |
| Objective:    | General introduction to SpanSet followed by an extensive product training on how to use the clamps and areas of application |
| Training:     | Presentation explaining the clamps using practical examples and questions                                                   |
| Duration:     | 90-120 minutes, max. of 10 people per session                                                                               |
| Trainer:      | SpanSet certified trainer                                                                                                   |
| Location:     | SpanSet office, onsite or at distributor's office                                                                           |

### User Training:


|               |                                                                                                 |
|---------------|-------------------------------------------------------------------------------------------------|
| Target group: | Shop floor workers and safety employees                                                         |
| Objective:    | Working safely with lifting clamps. Using the right clamp, in the right way, at the right place |
| Training:     | Presentation explaining the clamps using practical examples and questions                       |
| Duration:     | 90-120 minutes, max. of 15 people per session                                                   |
| Trainer:      | SpanSet certified trainer                                                                       |
| Location:     | Onsite at customer's premises                                                                   |

### Repair Training:


|               |                                                                                                                                                                                                                                             |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Target group: | Service engineers or SpanSet authorised dealers                                                                                                                                                                                             |
| Objective:    | Obtain qualification as SpanSet certified repair station                                                                                                                                                                                    |
| Training:     | Inspection, disassembling and assembling clamps Inspecting tolerances by using the SpanSet repair manual test of total procedure: inspection, disassembling, assembling and testing<br>General applications of Exoset safety lifting clamps |
| Duration:     | Full day training: 8:30-16:30<br>Maximum of 3 people per training                                                                                                                                                                           |
| Trainer:      | SpanSet certified trainer                                                                                                                                                                                                                   |
| Location:     | SpanSet World-wide                                                                                                                                                                                                                          |

## CERTIFICATES


### SALES TRAINING EXOSET SAFETY LIFTING CLAMPS

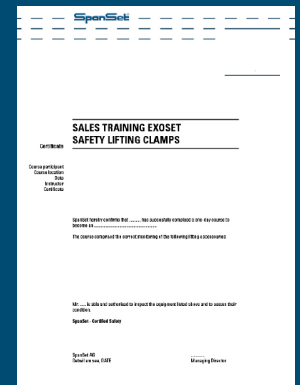


### USER TRAINING EXOSET SAFETY LIFTING CLAMPS

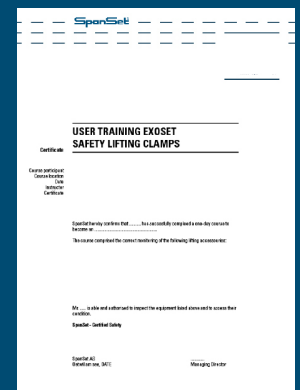

### REPAIR TRAINING EXOSET SAFETY LIFTING CLAMPS

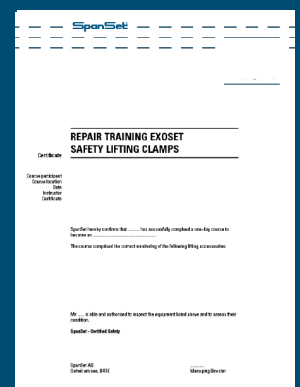


### AUTHORISED DEALER SAFETY LIFTING CLAMPS

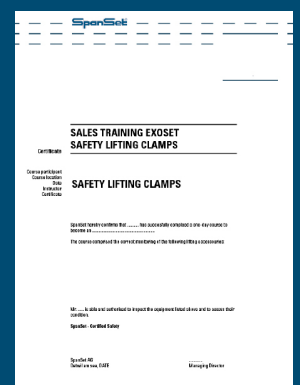




## SpanSet International Services AG

Samstagenstrasse 45,  
CH-8832 Wollerau  
Phone +41 (0)44 929 70 70  
Fax +41 (0)44 929 70 71  
info@spanset.com  
www.spanset.com

## More from SpanSet

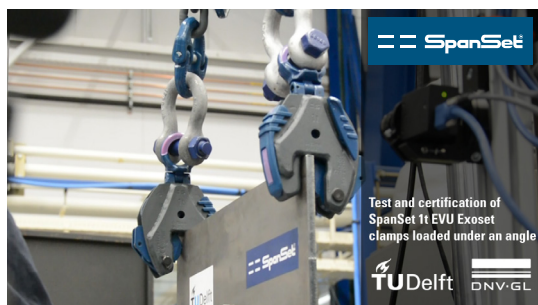

Watch the clamp testing videos on [www.spanset.com](http://www.spanset.com)

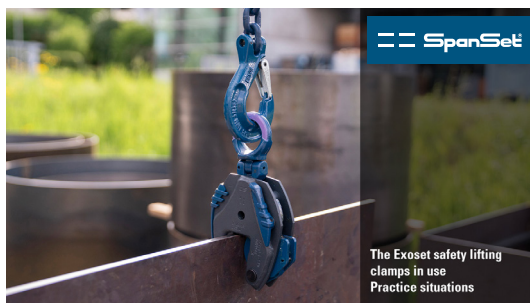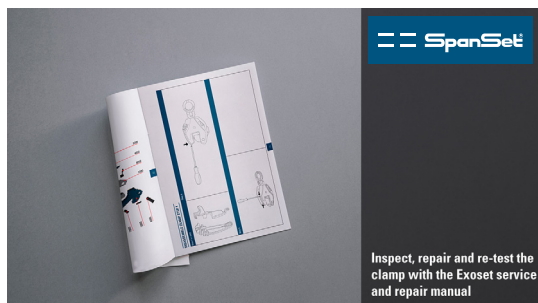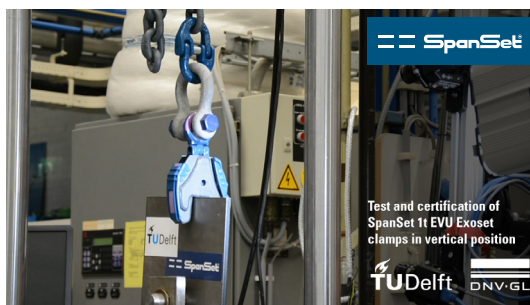

Watch the videos of clamp repair and practice situations on [www.spanset.com](http://www.spanset.com)



[www.spanset.com](http://www.spanset.com)

## SpanSet certified safety

Subject to technical changes without notice. All rights reserved. No part of this catalogue may be reproduced in any form (by printing, photocopying, microfilm or any other method) or processed, copied or distributed by electronic methods without the written permission of SpanSet®. This catalogue has been created with all due attention to detail; SpanSet® accepts no liability for any errors or omissions.

Misprints, errors and modifications excepted!

All prices excl. VAT, ex works.